




PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>B60G 7/00, 9/00, 3/14</b>	<b>A2</b>	(11) International Publication Number: <b>WO 95/28294</b> (43) International Publication Date: 26 October 1995 (26.10.95)
<p>(21) International Application Number: PCT/US94/04109</p> <p>(22) International Filing Date: 14 April 1994 (14.04.94)</p> <p>(71) Applicant (for all designated States except US): NAI NEWAY, INC. [US/US]; 1950 Industrial Boulevard, P.O. Box 425, Muskegon, MI 49443-0425 (US).</p> <p>(72) Inventors; and</p> <p>(75) Inventors/Applicants (for US only): PIERCE, William, C. [US/US]; 221 North Stewart Street, Muskegon, MI 49442 (US). RICHARDSON, Gregory, A. [US/US]; 10260 Ewing Road, Holton, MI 49425 (US).</p> <p>(74) Agent: BAIR, Joel, E.; Varnum, Riddering, Schmidt &amp; Howlett, Bridgewater Place, P.O. Box 352, Grand Rapids, MI 49501-0352 (US).</p>	<p>(81) Designated States: AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, ES, FI, GB, HU, JP, KP, KR, LK, LU, MG, MN, MW, NL, NO, PL, RO, RU, SD, SE, SK, US, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p><b>Published</b> Without international search report and to be republished upon receipt of that report.</p>	

(54) Title: TRAILING ARM SUSPENSION

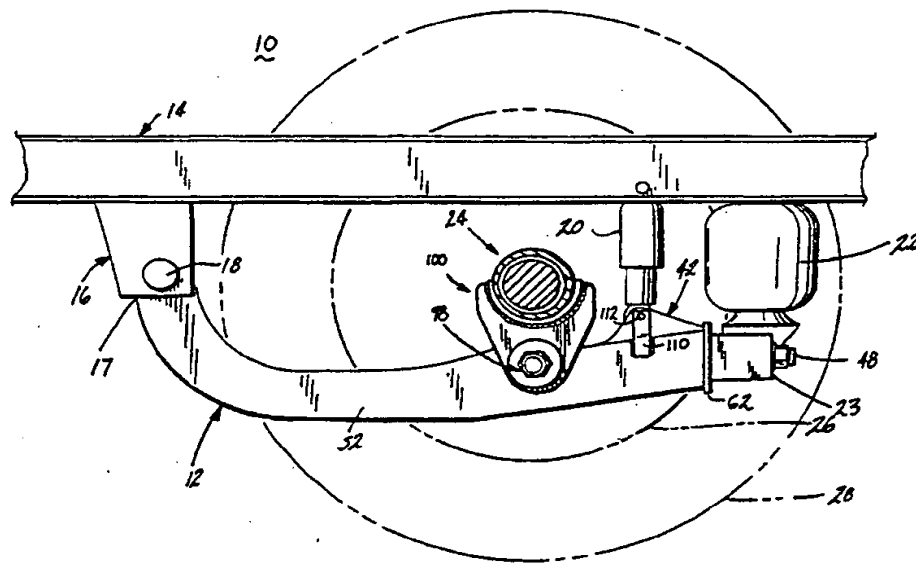

## (57) Abstract

A trailing arm suspension (10) has a trailing arm (12) comprising a central rib (32) to which opposing U-shaped side plates (52, 54) are welded. The central rib (32) and the opposing side plates (52, 54) have congruent semicircular recesses (34, 38) disposed at one end of the trailing arm to define a first seat (55) for receiving a mounting collar (36) to mount the one end of the trailing arm to a hanger bracket (16). The central rib (32) and opposing side plates (52, 54) have further congruent semicircular recesses (56, 58) that define a second seat (57) in which is mounted a cast member (40) for mounting an axle (24). A portion of the central rib extends above the opposed side plates and defines a shock absorber mount (42). The other end of the central rib (32) has a rectangular recess (46) for receiving an end shaft (48) to mount a transverse beam.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				



-2-

construction. The I-beamlike construction requires that the trailing arm be cast or forged rather than fabricated from separate pieces.

### SUMMARY OF INVENTION

5 The invention lies in a fabricated beam for use in a trailing arm suspension that is relatively simple in construction and inexpensive to assemble. The basic beam is formed of three pieces connected at two joints. A shock absorber bracket is integrally formed with the basic beam. A casting fixed in a preformed seat in the basic beam facilitates an axle connection with the beam.

10 In one aspect, the beam comprises a longitudinal rib having top and bottom edges. First and second side channel plates are disposed on opposite sides of the longitudinal rib. Each of the first and second side channel plates has top and bottom lateral walls and a bight portion. The top and bottom lateral walls of the first and second side channel plates have side channel plate  
15 edges. The longitudinal rib and the first and second side channel plates are connected by a top weld securing the first and second top side channel plate edges to the longitudinal rib top edge and a bottom weld securing the first and second bottom side channel plate edges to the longitudinal rib bottom edge.

20 Preferably, the top weld and the bottom welds are longitudinal. The first and second top side channel plate edges and the longitudinal rib top edge define a notch in which the top weld is disposed. Similarly the first and second bottom side channel plate edges and the longitudinal rib bottom edge can also define a notch in which the bottom weld is disposed. Generally, the longitudinal rib and first and second side channel plates are stamped from  
25 steel.

The beam has means for mounting an axle. Preferably, the axle mounting means comprises a seat in the beam in which is disposed a cast member having an aperture for mounting the axle. The beam also has a seat at one end of the beam in which is mounted a collar for pivotally mounting  
30 the beam to the vehicle frame. Generally, the longitudinal rib and the first and second channel plates are curved to form a curved beam. The other end of the beam mounts a shaft assembly to enable a transverse beam to connect trailing arms on opposite sides of the vehicle.

-3-

The longitudinal rib can have a portion with an aperture that extends beyond the first and second side channel plate edges to form a shock bracket.

In another aspect, the invention is directed to a trailing arm adapted for use in a trailing arm suspension wherein the trailing arm comprises first and second ends with the first end having means to pivotally mount the trailing arm to a vehicle frame and axle mounting means intermediate the first and second ends. The axle mounting means comprises a seat in the trailing arm and a cast member having an aperture complementary in shape to the shape of the seat and welded to the seat. Preferably, the seat is substantially U-shaped and the aperture is substantially circular. The cast member has a locating rib for positioning the cast member with respect to the trailing arm.

In yet another aspect of the invention, a trailing arm suspension comprises a trailing arm having first and second ends, the first end being pivotally mounted to the vehicle frame and the second end being mounted to the vehicle frame by a force dampening means for dampening forces imparted to the trailing arm suspension. The trailing arm comprises a longitudinal rib having top and bottom edges. First and second side channel plates having top and bottom lateral walls and a bight portion are welded to the longitudinal rib. The lateral walls of the first and second channel plates have edges. A top weld secures the first and second top lateral wall edges to the top longitudinal rib edge and a bottom weld secures the first and second bottom lateral wall edges to the bottom longitudinal rib edge.

### BRIEF DESCRIPTION OF THE DRAWINGS

The invention will now be described with reference to the drawings wherein:

FIG. 1 is a plan view of a trailing arm suspension incorporating the trailing arm according to the invention;

FIG. 2 is an exploded view of the trailing arm of FIG. 1;

FIG. 3 is an elevational view of the trailing arm of FIG. 1 with parts cut away for clarity;

FIG. 4 is a top view of the trailing arm of FIG. 3;

FIG. 5 is a sectional view taken along lines 5-5 of FIG. 3;

-4-

FIG. 6 is a sectional view taken along lines 6-6 of FIG. 3; and  
FIG. 7 is a sectional view taken along lines 7-7 of FIG. 3.

### DESCRIPTION OF THE PREFERRED EMBODIMENTS

FIG. 1 illustrates a vehicle having a trailing arm suspension 10  
5 incorporating a trailing arm 12 according to the invention. A portion of a  
vehicle frame 14 is shown, with the front of the vehicle to the left in FIG. 1.  
The suspension 10 mounts the frame 14 to ground engaging wheels 26 and  
tires 28 (only one of which is shown in FIG. 1). It will be understood that a  
complete suspension 10 comprises a pair of trailing arms 12, one each  
10 mounted to opposite sides of the vehicle. For clarity, however, only one side  
of the vehicle is illustrated in FIG. 1.

The trailing arm 12 is pivotally mounted at one end 17 by a bushed  
connection 18 to a frame bracket assembly 16, which is rigidly fixed to the  
vehicle frame 14. The bushed connection 18 is commonly known in the art.  
15 The trailing arm 12 mounts an air spring assembly 22, either on the free end  
23 of the trailing arm or an extension thereof. The upper portion of the air  
spring assembly 22 is secured to the frame 14 to enable the air spring to  
cushion the normal upward and downward movement of the frame when the  
vehicle is in motion. A shock absorber 20 extending between the trailing arm  
20 12 and the vehicle frame 14 dampens the upward and downward motion. An  
axle 24 carrying the ground engaging wheels 26 and tires 28, is securely  
mounted to the trailing arm 12 intermediate the ends 17, 23.

Referring to FIGS. 1, 2 and 3, the trailing arm 12 is generally J-shaped  
in elevational profile, adapted to initially extend downwardly from the vehicle  
frame 14 and then extend rearwardly thereof. The J-shape of the trailing arm  
25 12 provides one end of the trailing arm 12 for mounting to the vehicle frame  
14 with a relatively short frame bracket 16 while maintaining a separation  
between the frame 14 and the free end 23 of the trailing arm 12 so that  
suspension members such as shock absorber 20 and air spring 22 can be  
30 mounted between the other end of the trailing arm 12 and the frame 14. One  
end 17 of the trailing arm 12 has a mounting collar 36 for receiving a bushing  
and pin to form the bushed connection 18 to mount the trailing arm 12 to the  
frame bracket assembly 16. The free end 23 of the trailing arm 12 mounts an

-5-

end shaft 48, which is adapted to receive a complementary collar in a bushed connection for a transverse beam extending between the trailing arms on opposite sides of the vehicle in a manner well known in the art. The transverse beam resists torsional forces acting on the trailing arms, thereby providing some resistance to roll and sway. The transverse beam sometimes supports the air springs 22. A cast member 40 for mounting a bushed connection 98 that mounts axle 24 to the trailing arm 12 is mounted between the ends 17 and 23 of the trailing arm.

Referring specifically to FIGS. 2 - 4 and generally to FIG. 5, the trailing arm 12 comprises a central rib 32 that serves as the spine of the trailing arm 12. The central rib has a top edge 33 and a bottom edge 35 as best seen in FIGS. 2 and 5. The central rib 32 has a semicircular recess 34 in which the mounting collar 36 is received. An arcuate recess 38 located between the ends of the central rib receives the cast member 40. A shock bracket or extension 42 of the central rib 32 has a shock absorber opening 44 for mounting shock absorber 20. The other end of the central rib 32 adjacent the air spring 22 has a rectangular recess 46 for mounting the end shaft 48. The complexity of assembling the trailing arm suspension is reduced by integrating the shock absorber bracket 42 with the central rib 32 rather than attaching a separate shock absorber bracket after assembly of the trailing arm as done in prior trailing arm suspensions.

The trailing arm 12 also comprises side plates 52 and 54 which are channel-shaped, preferably being U-shaped in cross section. Other cross sections, such as a C-shape or a V-shape, for example, are suitable. The side plates 52 and 54 are welded to the central rib 32 by upper weld 66 and lower weld 68 to form a box beam with a central rib or spine. Although the welds 66 and 68 are illustrated as extending the longitudinal length of the central web 32, the welds 66 and 68 can be spot welded. The side plates 52 and 54 are mirror images of each other. Therefore, only one of the side plates will be described in detail. Side plate 52 has a top lateral wall 59 and a bottom lateral wall 60 connected by a bight portion 61. The top lateral wall 59 and bottom lateral wall 60 have a top edge 84 and a bottom edge 86, respectively. Side plate 52 has a semicircular recess 56, which is congruent in shape to the semicircular recess 34 of the central rib 32 for mounting the mounting collar

-6-

36. The semicircular recesses 34 and 56 of the central rib 32 and side plates 52, 54 form a first seat 55 for mounting the mounting collar 36. The mounting collar 36 is also welded to the central rib 32 and side plates 52 and 54 by welds 69 and 70.

5                    Preferably, at least one shock absorber mount plate 110 with aperture 112 is welded to one of the side plates 52 and 54. The shock absorber mount plate 110 cooperates with the shock absorber bracket 42 to form a clevis with which to mount a shock absorber. The side plate 52 or 54 to which the shock mount plate 110 is mounted depends on which side of the  
10 vehicle the trailing arm is disposed. Alternatively, shock mount plates 110 having apertures 112 can be mounted, preferably by welding, to both side plates 52 and 54 so that the trailing arm 12 can be used as a left or right hand trailing arm 12 (FIG. 7). In this manner, the trailing arm 12 is a universal trailing arm.

15                    Referring now to FIGS. 2, 3 and 6, the side plate 52 also has an arcuate recess 58 that is congruent in shape to arcuate recess 38 of the central rib 32 for mounting the cast member 40 although not as deep as the arcuate recess 38. The arcuate recesses 38 and 58 of the central rib 32 and side plates 52, 54 form a second seat 57 for mounting the cast member 40. Preferably,  
20 the central rib 32 and the side plates 52, 54 are formed of stamped steel plate.

                    The cast member 40 is generally tubular having a central aperture 76, and is preferably made from steel. The casting has reduced diameter portions 78 and 80 that define an alignment rib 82. The alignment rib 82 is disposed between the side plates 52 and 54 to align the cast member 40 within the  
25 trailing arm 12 and second seat 57. The cast member 40 is disposed within the arcuate recesses 38 and 58 with the reduced diameter portions 78, 80 resting in the recess 58 and the rib 82 resting in the recess 38. The cast member 40 is welded to the central rib 32 by a weld (not shown) and side plates 52 and 54 by welds 72 and 74. A bushed connection 98 is mounted  
30 within the aperture 76 of the cast member 40. The bushed connection 98 is common in the art.

                    Referring to FIG. 2, the axle 24 is mounted to the trailing arm 12 by axle bracket 100. Axle bracket 100 has opposing plates 102 that have an aperture 104 at one end to mount the plates 102 to the bushed connection 98.



-7-

The other end of each plate has a conformed surface 106 which supports a seat 108 welded thereto. The axle 24 is mounted to the seat 108, preferably by welding.

Referring to FIGS. 2 and 6, an end plate 62 having an opening 64 for receiving the end shaft 48 is welded to the central rib 32 and side plates 52 and 54 by weld 65 to complete the trailing arm 12. It will be apparent that only three welds are needed to assemble the basic structure of the trailing arm 12, a significant reduction from the number required in prior fabricated trailing arms.

To assemble the trailing arm 12 according to the invention, the mounting collar 36, cast member 40, and end shaft 48 are mounted to the central web. The mounting collar 36 is placed within the semicircular recess 34 and preferably welded thereto. The cast member 40 is placed within the arcuate recess 38 and welded thereto. In a similar manner, the end shaft 48 is positioned within the rectangular recess 46 and welded to the central rib 32.

After the mounting collar 36, cast member 40, and end shaft 48 are mounted to the central rib 32, the side plates 52 and 54 are mounted to the central rib 32 by welds 66 and 68. Preferably, the plates 52, 54 are abutted against opposite sides of the central rib 32, but the central rib 32 is sufficiently shorter than the side plates 52, 54 so that a top notch 90 and a bottom notch 92 are formed by the top edges 33, 84 and bottom edges 35, 86 respectively. The welds 66 and 68 are laid in the top notch 90 and bottom notch 92, respectively. The side plates 52, 54 are then welded to the mounting collar 36 and cast member 40 by welds 69, 70 and 72, 74, respectively.

The end plate 62 is then pressed onto the end shaft 48 and welded to the central rib 32 and side plates 52, 54 by welds 65. Alternatively, the end plate 62 can be pressed onto the end shaft 48 prior to the welding of the end shaft 48 to the central rib 32.

The present invention greatly simplifies the assembly of the trailing arm 12. Other benefits include a lack of any required machining prior to or after assembly to form an aperture for receiving the axle 24 of the trailing arm suspension. Nor does a special shock absorber mounting bracket need be added to the trailing arm 12 after assembly because the center rib 32 has a

-8-

shock absorber bracket 42 with opening 44 integrally formed with the central rib 32 for mounting shock absorber 20.

- While particular embodiments of the invention have been shown, it will be understood, of course, that the invention is not limited thereto since
5. modifications may be made by those skilled in the art, particularly in light of the foregoing teachings. Reasonable variation and modification are possible within the scope of the foregoing disclosure of the invention without departing from the spirit of the invention.

-9-

CLAIMS

The embodiments of the invention in which an exclusive property or privilege is claimed are defined as follows:

1. A beam (12) adapted for use as a trailing arm in a trailing arm suspension (10) and comprising:
  - a longitudinal rib (32) having top (33) and bottom (35) edges;
  - a first side plate (52) having top (59) and bottom (60) lateral walls  
5 terminating in lateral edges (84, 86) and connected by a bight wall portion (61);
  - a second side plate (54) having top (59) and bottom (60) lateral walls terminating in lateral edges (84, 86) and connected by a bight wall portion (61);
  - 10 a top weld (66) securing first and second top lateral wall edges to the top longitudinal rib edge; and
  - a bottom weld (68) securing first and second bottom lateral wall edges to the bottom longitudinal rib edge.
2. A beam (12) according to claim 1 wherein one of the top weld (66) and bottom weld (68) extends substantially the length of the longitudinal rib 32.
3. A beam (12) according to claim 2 wherein the other of the top (66) and bottom (68) weld extends substantially the length of the longitudinal rib 32.
4. A beam (12) according to claim 1 wherein the first and second top lateral wall edges (84) and the top longitudinal rib edge (33) define a notch (90) in which the top weld (66) is disposed.
5. A beam (12) according to claim 4 wherein the first and second bottom lateral wall edges (86) and the bottom longitudinal rib edge (35) define a second notch (92) in which the bottom weld (68) is disposed.

-10-

6. A beam (12) according to claim 1 wherein the first and second bottom lateral wall edges (86) and the bottom longitudinal rib edge (35) define a notch (92) in which the bottom weld (68) is disposed.

7. A beam (12) according to claim 1 wherein the longitudinal rib (32) is a steel stamping.

8. A beam (12) according to claim 1 wherein the longitudinal rib (32) and first and second side plates (52, 54) are curved in side elevation to form a curved beam.

9. A beam (12) according to claim 1 wherein the first and second side plates (52, 54) are steel.

10. A beam (12) according to claim 1 wherein the first and second side plates (52, 54) are C-shaped in cross section.

11. A beam (12) according to claim 1 further comprising axle mounting means (40, 57) for mounting an axle (24) to the beam.

12. A beam (12) according to claim 11 wherein the axle mounting means (40, 57) comprises a seat (57) in the beam and in which is disposed a cast member (40) having an aperture (76) for receiving an axle (24).

13. A beam (12) according to claim 1 wherein the beam (12) has a seat (55) at one end (17 or 23) thereof which is adapted to mount the one end of the beam to a frame member (14) of a vehicle.

14. A beam (12) according to claim 13 wherein the beam further comprises a collar (36) disposed in the seat (55), the collar having an aperture through which the beam can be pivotally mounted to the vehicle frame.

-11-

15. A beam (12) according to claim 1 further comprising a shaft assembly (48) mounted to the longitudinal rib (32).

16. A beam (12) according to claim 15, wherein the longitudinal rib (32) has a complementary recess (46) at one end and in which the shaft assembly (48) is mounted.

17. A beam (12) according to claim 1 wherein the longitudinal rib (32) has a portion (42) with an aperture (44) and which extends beyond the first and second top lateral wall edges (84) to form a shock bracket.

18. A beam (12) according to claim 1 further comprising an end plate (62) mounted to one end of the beam.

19. A beam (12) according to claim 18 wherein the end plate (62) has an aperture (64) and the beam further comprises a shaft assembly (48) extending through the aperture.

20. In a trailing arm (12) adapted for use in a trailing arm suspension (10), the trailing arm comprising first and second ends (17, 23), the first end (17) having means (16, 17, 18, 36) to pivotally mount the trailing arm to a vehicle frame (14) and axle mounting means (40, 57) intermediate the first and second ends, the improvement in the axle mounting means comprising:  
5       a seat (57) in the trailing arm, and  
      a cast member (40) having an aperture (76) therethrough wherein the cast member is complementary in shape to the shape of the seat and is welded to the seat.

21. A trailing arm (12) according to claim 20 wherein the seat is substantially U-shaped.

22. A trailing arm (12) according to claim 21 wherein the cast member (40) further comprises a locating rib (82) to position the cast member (40) with respect to the trailing arm (12).

-12-

23. A trailing arm (12) according to claim 22 wherein the trailing arm (12) is made from steel.

24. A trailing arm (12) according to claim 20 wherein the cast member (40) further comprises a locating rib (82) to position the cast member (40) with respect to the trailing arm (12).

25. In a trailing arm suspension (10) comprising a trailing arm (12) having first and second ends (17, 23), the first end adapted to pivotally mount to a vehicle frame (14) and the second end adapted to mount to the vehicle frame through a force dampening means (20, 22) for dampening forces imparted to the trailing arm suspension, and an axle mount (40, 57) adapted to mount an axle (24), the improvement in the trailing arm comprising:

5 a longitudinal rib (32) having top and bottom edges (84, 86);  
a first side plate (54) having top and bottom lateral walls (59, 60) and a bight wall portion (61);

10 a second side channel plate (56) having top and bottom lateral walls (59, 60) and a bight wall portion (61);  
the lateral walls of the first and second side channel members having edges (84, 86);  
a top weld (66) securing the first and second top lateral wall edges to the top longitudinal rib edge; and

15 a bottom weld (68) securing the first and second bottom lateral wall edges to the bottom longitudinal rib edge.

26. A trailing arm suspension (10) according to claim 25 wherein the axle mount (40, 57) further comprises a seat (57) and the trailing arm (12) has a cast member (40) received in the seat.

27. A trailing arm suspension (10) according to claim 26 wherein the cast member (40) further comprises a locating rib (82) to position the cast member (40) with respect to the trailing arm (12).

1/4

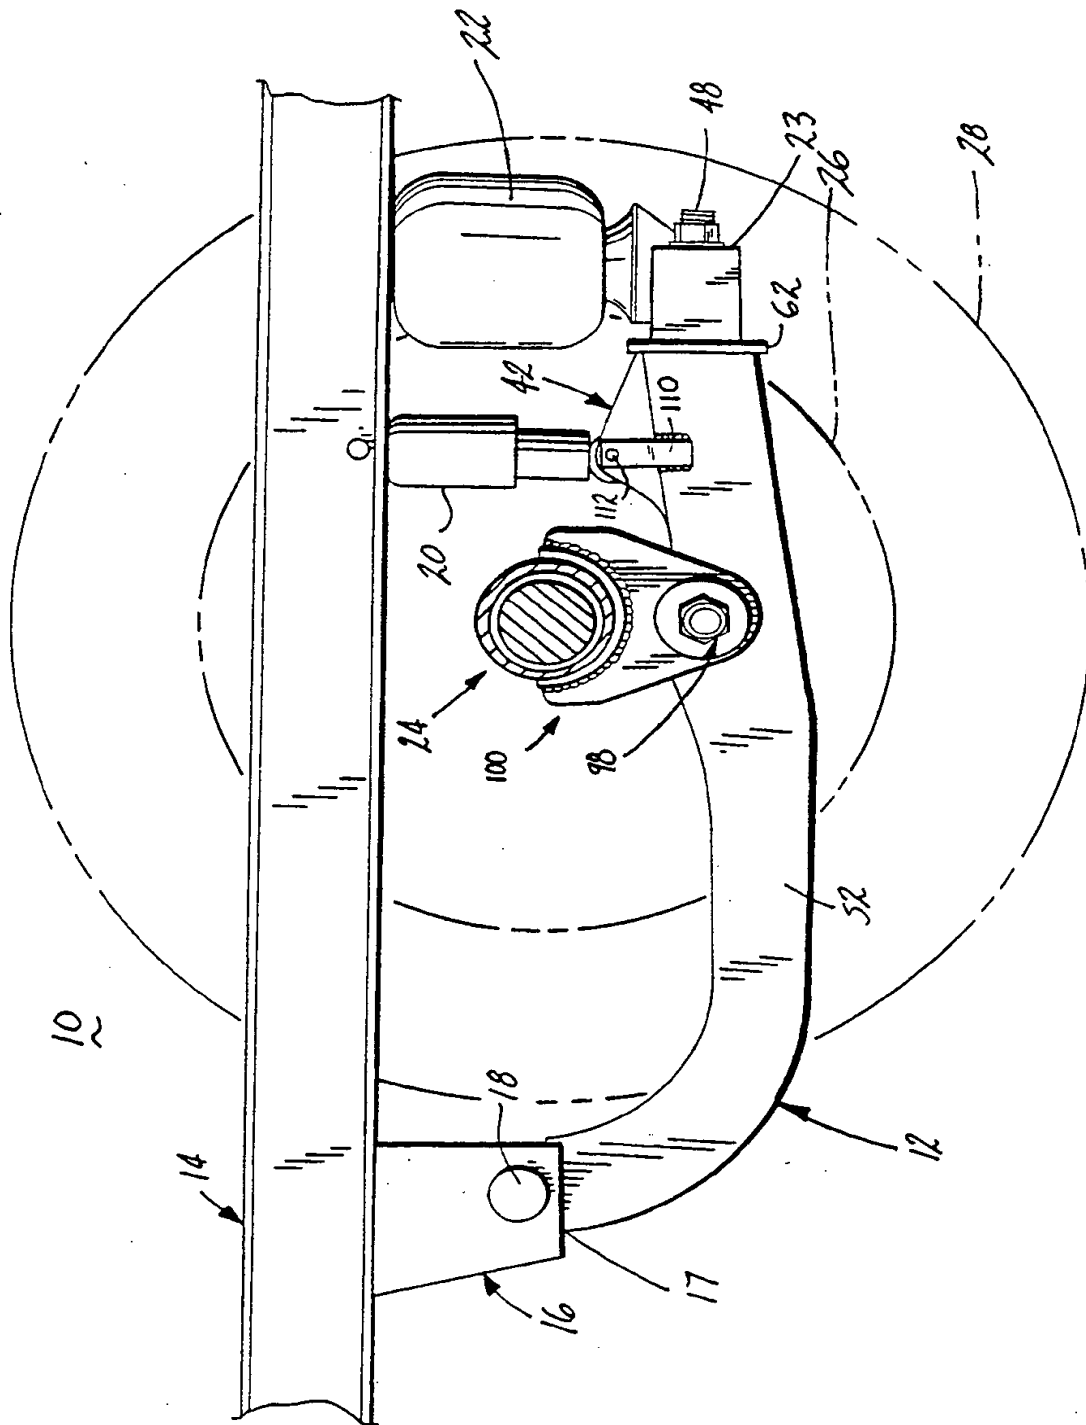


FIG. 1

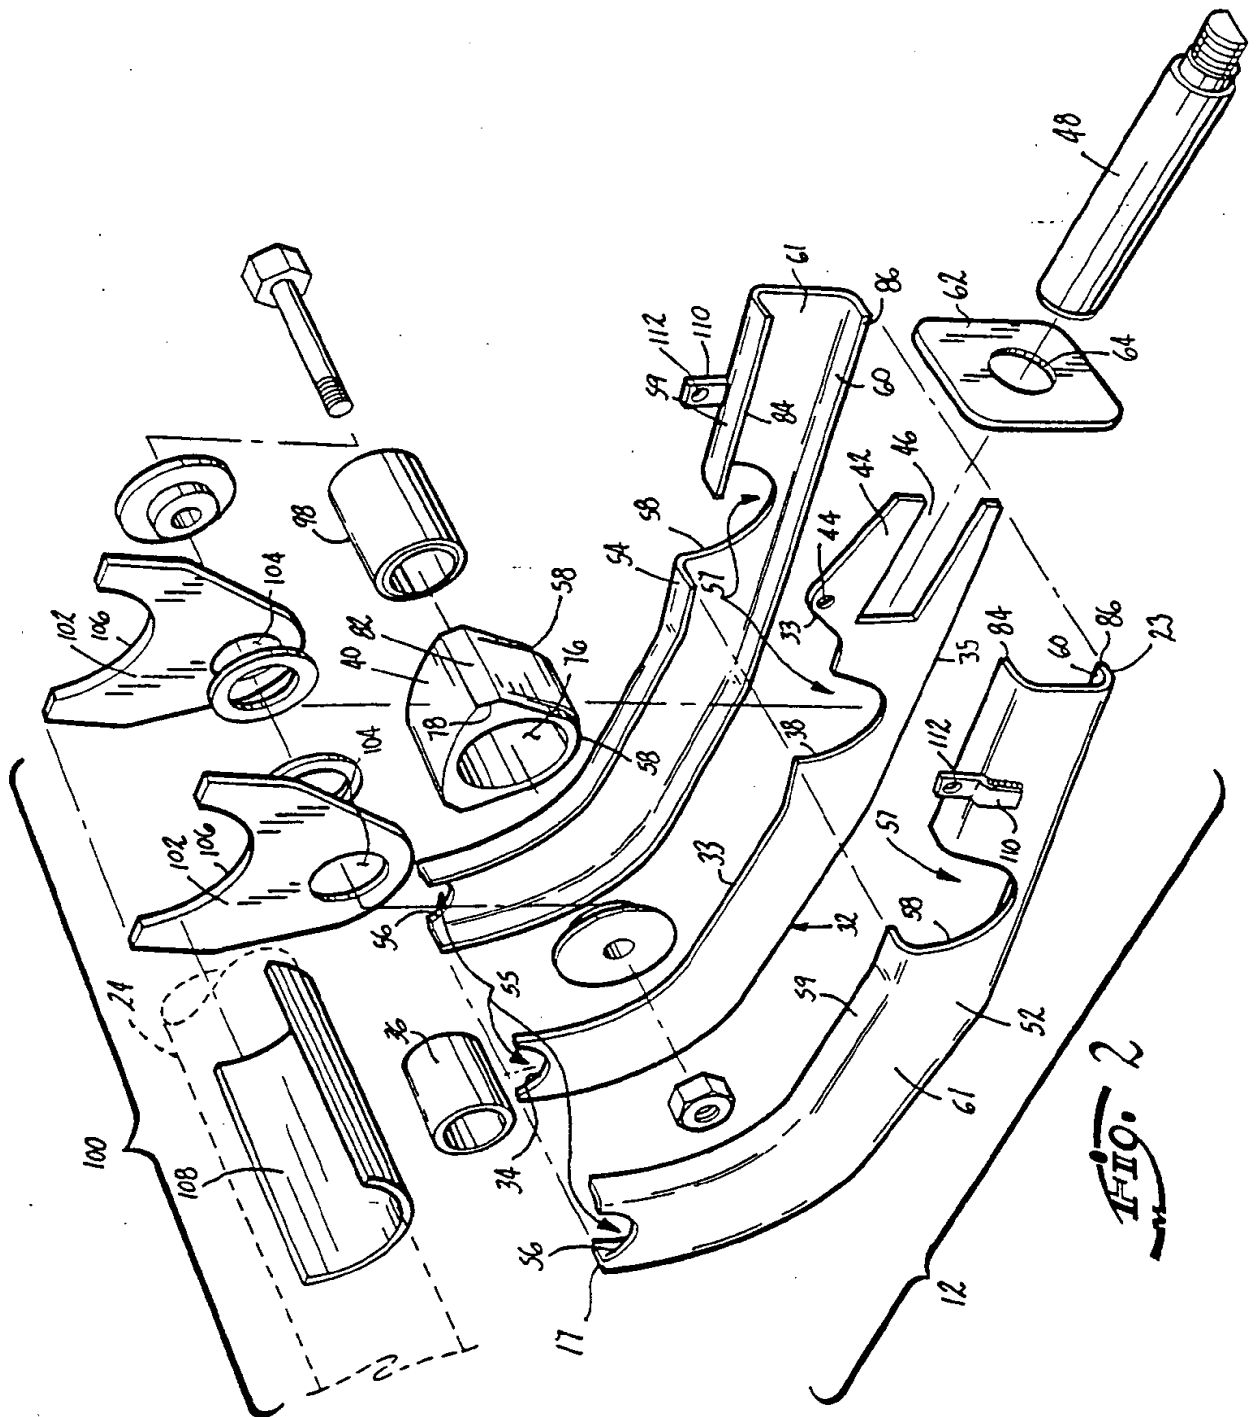


FIG. 2



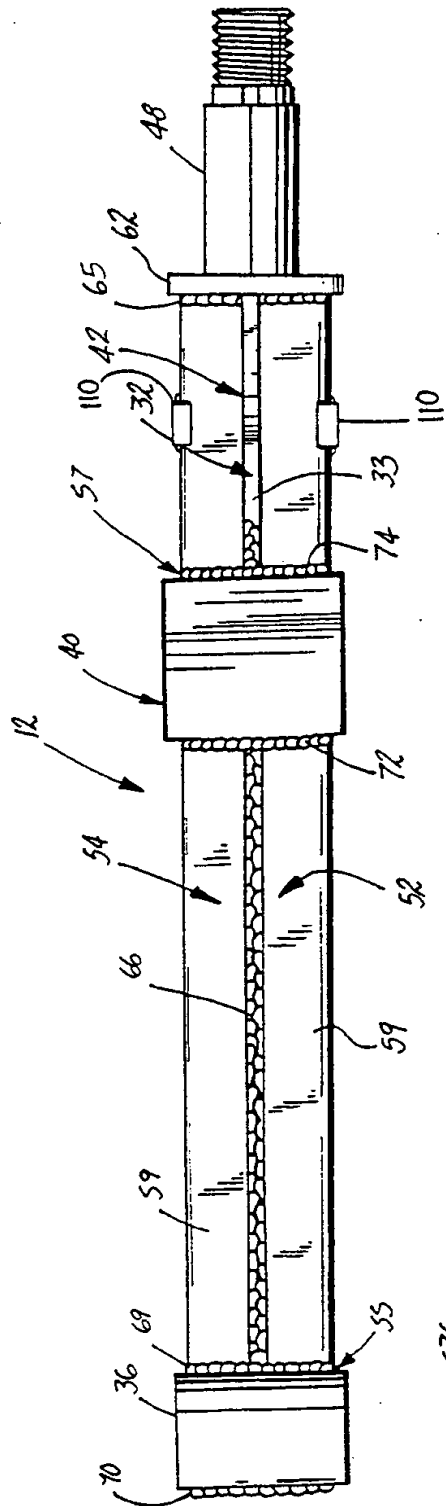


FIG. 4


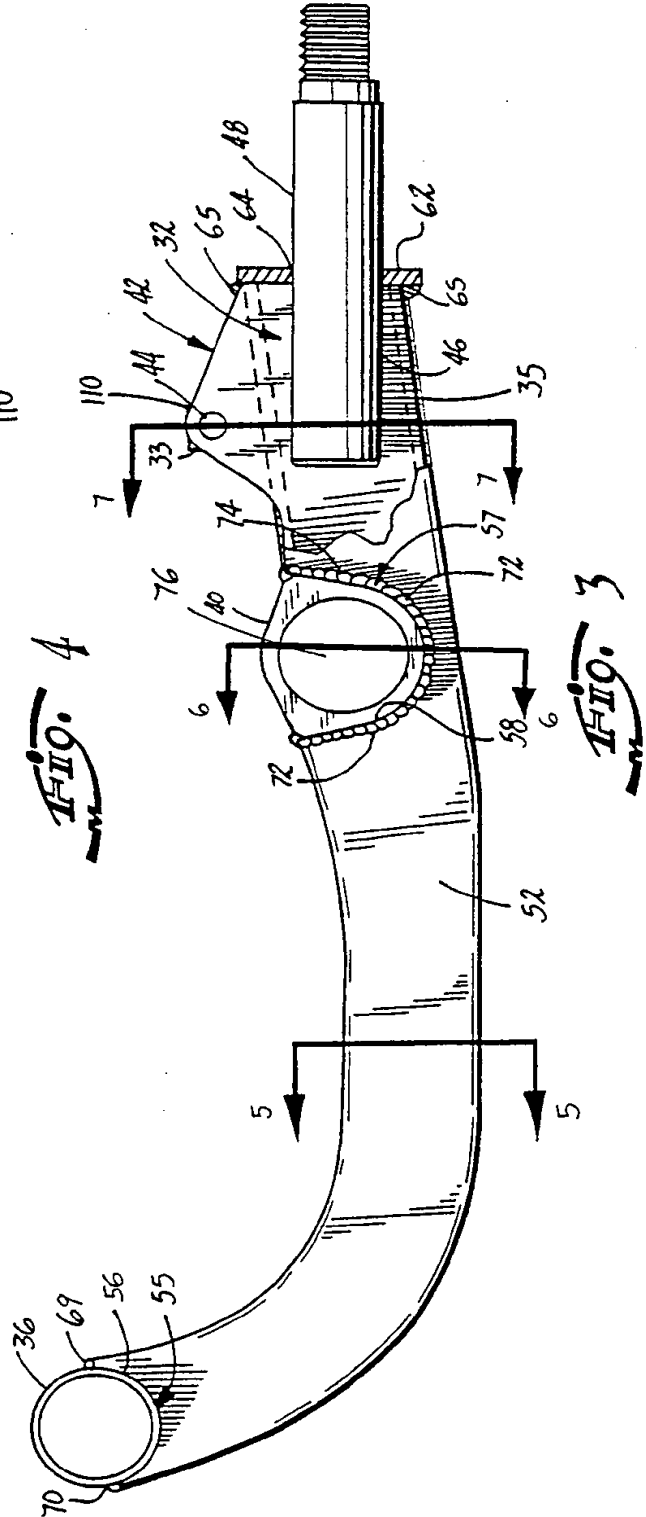


FIG. 3



PCT


WORLD INTELLECTU  
Inter

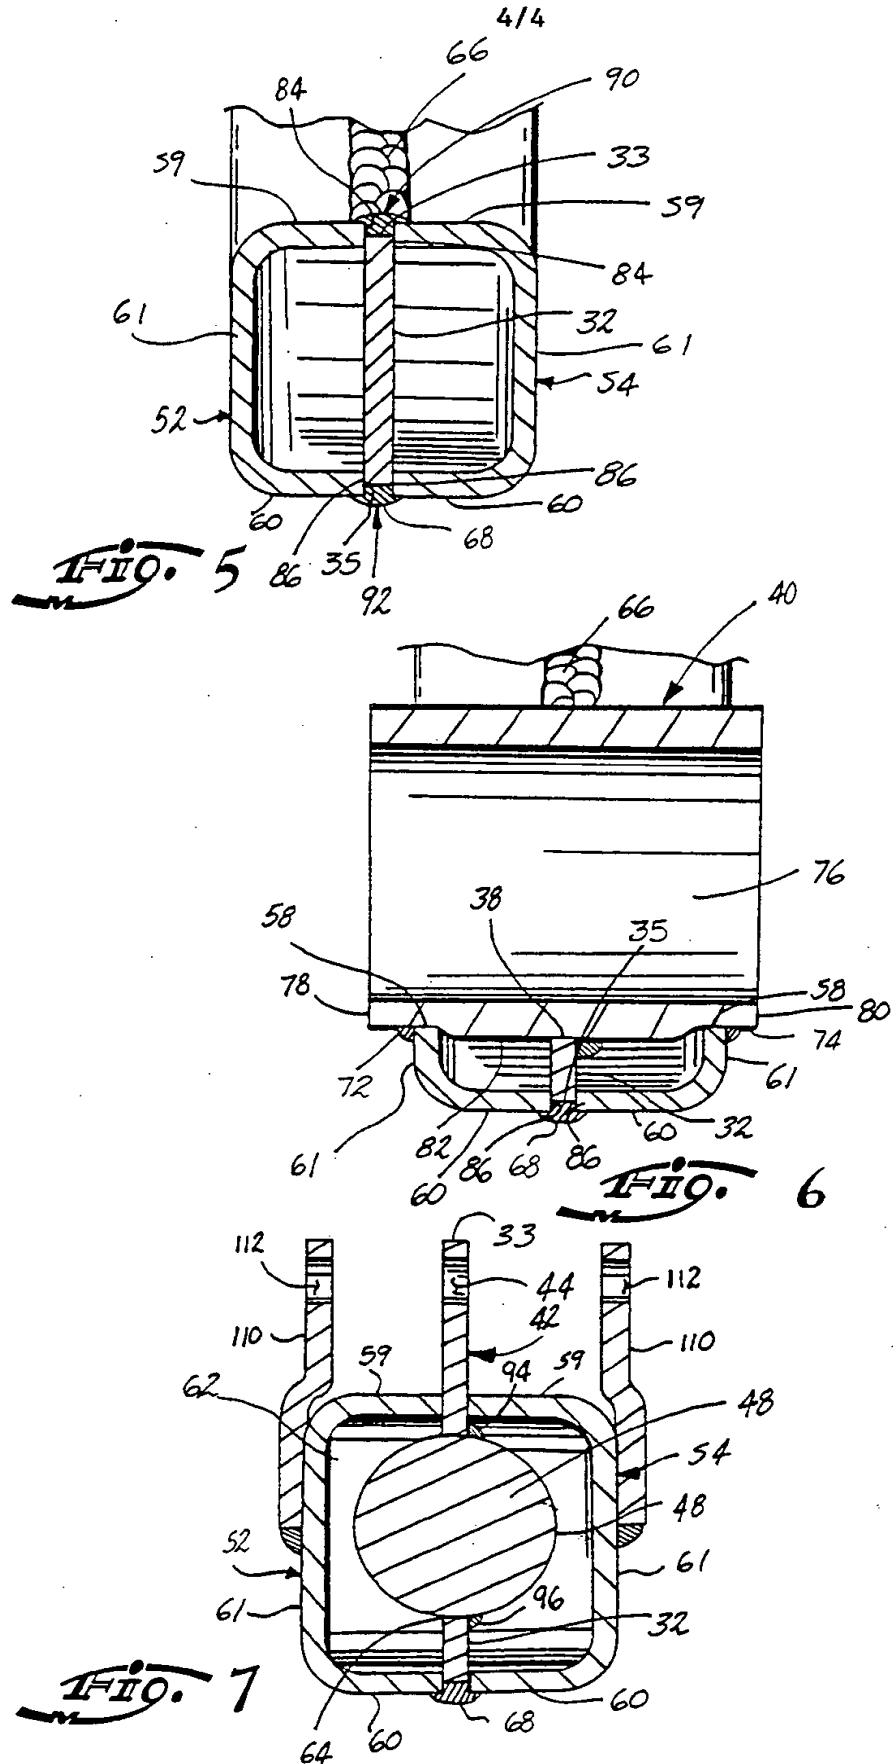

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>B60G 7/00, 9/00, 3/14</b>		A3	(11) International Publication Number: <b>WO 95/28294</b>
			(43) International Publication Date: 26 October 1995 (26.10.95)
(21) International Application Number: PCT/US94/04109 (22) International Filing Date: 14 April 1994 (14.04.94) (71) Applicant (for all designated States except US): NAI NEWAY, INC. [US/US]; 1950 Industrial Boulevard, P.O. Box 425, Muskegon, MI 49443-0425 (US). (72) Inventors; and (75) Inventors/Applicants (for US only): PIERCE, William, C. [US/US]; 221 North Stewart Street, Muskegon, MI 49442 (US). RICHARDSON, Gregory, A. [US/US]; 10260 Ewing Road, Holton, MI 49425 (US). (74) Agent: BAIR, Joel, E.; Varnum, Riddering, Schmidt & Howlett, Bridgewater Place, P.O. Box 352, Grand Rapids, MI 49501-0352 (US).		(81) Designated States: AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, ES, FI, GB, HU, JP, KP, KR, LK, LU, MG, MN, MW, NL, NO, PL, RO, RU, SD, SE, SK, US, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>  (88) Date of publication of the international search report: 15 February 1996 (15.02.96)	

(54) Title: TRAILING ARM SUSPENSION

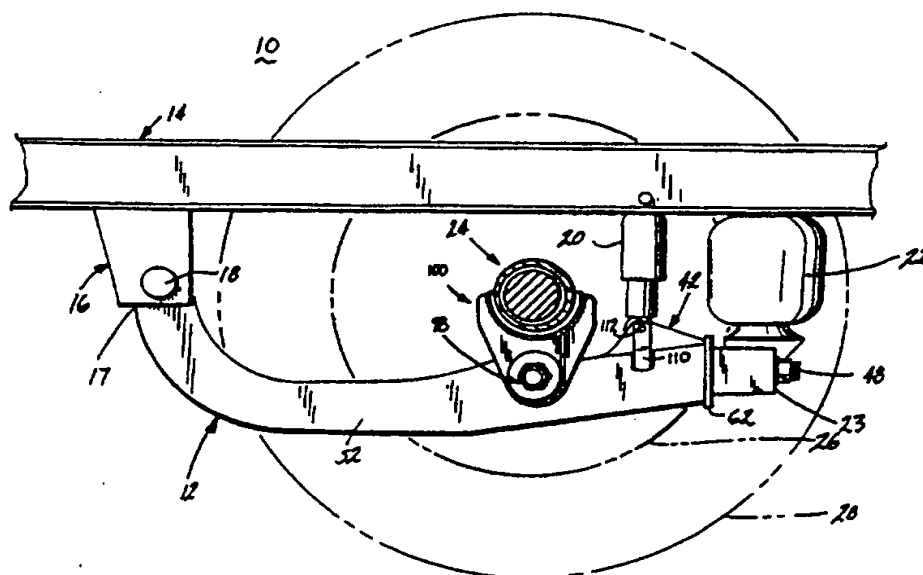

(57) Abstract

A trailing arm suspension (10) has a trailing arm (12) comprising a central rib (32) to which opposing U-shaped side plates (52, 54) are welded. The central rib (32) and the opposing side plates (52, 54) have congruent semicircular recesses (34, 38) disposed at one end of the trailing arm to define a first seat (55) for receiving a mounting collar (36) to mount the one end of the trailing arm to a hanger bracket (16). The central rib (32) and opposing side plates (52, 54) have further congruent semicircular recesses (56, 58) that define a second seat (57) in which is mounted a cast member (40) for mounting an axle (24). A portion of the central rib extends above the opposed side plates and defines a shock absorber mount (42). The other end of the central rib (32) has a rectangular recess (46) for receiving an end shaft (48) to mount a transverse beam.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

# INTERNATIONAL SEARCH REPORT

International Application No.  
PCT/US 94/04109

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 6 B60G7/00 B60G9/00 B60G3/14

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
IPC 6 B60G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	FR,A,2 526 721 (PEUGEOT) 18 November 1983 see page 3, line 4 - line 18; figure ---	20 23,26
A	FR,E,82 194 (RENAULT) 27 March 1964  see page 1, right column, line 22 - line 31; figure 4 see page 1, left column, paragraph 2 ---	1-3, 7-13,20, 23,25,26
A	EP,A,0 323 414 (FIAT) 5 July 1989  see column 1, line 63 - column 2, line 3; figures 1-3 ---	1,17,20, 23,25
A	DE,U,87 07 020 (BERGISCHE ACHSENFABRIK) 25 June 1987 see figures ---	1,25
-/--		

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

\*Z\* document member of the same patent family

Date of the actual completion of the international search

28 December 1995

Date of mailing of the international search report

16. 01. 96

Name and mailing address of the ISA  
European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+31-70) 340-3016

Authorized officer

Torsius, A

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US 94/04109

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US,A,4 427 213 (RAIDEL) 24 January 1984 see column 4, line 31 - line 33; figures 1-3,6 ---	1,25
A	US,A,3 547 215 (BIRD) 15 December 1970 cited in the application see figures ---	1,25
A	FR,A,2 552 374 (HONDA MOTOR CO LTD) 29 March 1985 see figures 1,7,11,12 -----	20,23

# INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 94/04109

## Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:  
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

## Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

SEE ANNEX SHEET B

1. ☒ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☒ No protest accompanied the payment of additional search fees.

## INTERNATIONAL SEARCH REPORT

### LACK OF UNITY OF INVENTION

1. Claims: 1-19, 25-27  
A trailing arm consisting of two side plates and a central rib welded together
2. Claims: 20-24  
A trailing arm with a cast member welded in a seat in the arm

The independent claims 1, 20 and 25 and their respective dependent claims solve the following problems:

claim 1: improve the construction of a beam adapted for use as a trailing arm.

claim 20: improve the axle mounting means of a trailing arm.

claim 25: improve the construction of a trailing arm.

The solutions presented in the independent claims to solve these problems are the following:

For claim 1: - the beam consists of two side plates and a central rib welded together.

For claim 20: - a cast member is welded in a seat in the arm.

For claim 25: - the trailing arm consists of two side plates and a central rib welded together.

There is a technical relation between the features of the solution of claim 1 and the features of claim 25.

However, there is no technical relation between the problem and the features of the solution of claim 20 and the problem and the features of the solution of claims 1 and 25.

Therefore there exists non unity (Rule 13.2 PCT) between claims 1 - 19 and 25 - 27 and claims 20 - 24.

### CONCLUSIONS

Claims searched: 1 - 19 and 25 - 27.

Claims not searched: 20 - 24.

A partial search report was drawn up accordingly.



# INTERNATIONAL SEARCH REPORT

Information on patent family members

In: International Application No

PCT/US 94/04109

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
FR-A-2526721	18-11-83	NONE	
FR-E-82194	27-03-64	FR-E- 73187 FR-A- 1185602	23-09-60 03-08-59
EP-A-323414	05-07-89	DE-A- 3879447 US-A- 4911467	22-04-93 27-03-90
DE-U-8707020	25-06-87	NONE	
US-A-4427213	24-01-84	US-E- RE32486	01-09-87
US-A-3547215	15-12-70	DE-U- 1998386 DE-A- 1780251 FR-A- 1579290 GB-A- 1236427 NL-A- 6812823 SE-B- 356470	12-12-68 06-05-71 22-08-69 23-06-71 09-12-69 28-05-73
FR-A-2552374	29-03-85	JP-B- 1007885 JP-C- 1524771 JP-A- 60067203 JP-A- 60104406 DE-A- 3434790 DE-C- 3448231 FR-A- 2604400 GB-A, B 2147553 GB-A, B 2184072 US-A- 4740011 US-A- 4696488	10-02-89 12-10-89 17-04-85 08-06-85 18-04-85 21-12-95 01-04-88 15-05-85 17-06-87 26-04-88 29-09-87